

# Enclosed Belt Conveyor



## Enclosed Belt Conveyor

- Heavy-duty 1/4" idlers standard
- 1/4" cone and 1/4" tube
- 1/2" UHMW bottom standard
- 7GA Hot-dipped head and tail sections
- Full width inspection door head and tail
- Mine Duty Chevron tail pulley for more efficient reloading



Model BELT WIDTH	Capacity BPH					
	450 FPM	500 FPM	550 FPM	600 FPM	650 FPM	700 FPM
24	7500	8500	9500	10500	11500	12500
30	13000	14500	16000	17500	19000	20500
36	17000	19000	21000	23000	25000	27000
42	22500	25500	28000	30500	33000	35500
48	28500	32000	35000	38500	41500	44500
54	35000	39000	43000	46500	50500	54500

- Threaded concentric hub for true spinning idlers
- Threaded stub shaft with easy access retainer
- Larger belt edge distance for more forgiving loading
- Recessed bottom fasteners for full wear thickness of bottom liner
- Side panels reinforced with bearing bracket
- Bearings isolated from interior of housing
- Slide lagged head pulley
- Easy alignment rear tail door
- Easily adjusted take-up rods
- Fully sealed take-up housing
- Tapered loader for improved load centering
- Adjustable skirting
- Square flange for easy gate/spouting sizing

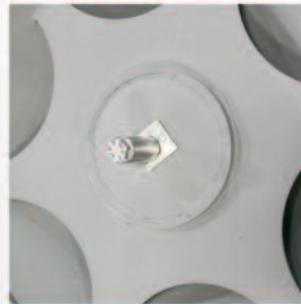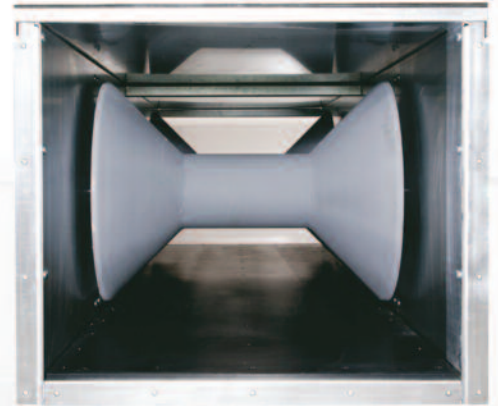

Warrior Mfg. Material Handling  
 Ph: 402-810-9630  
 Fax: 402-934-6050

Mailing Address:  
 14242 C Circle Suite B  
 Omaha, NE 68144