Our Story

Warrior was founded in 1978 and began manufacturing structural support systems for the grain handling industry including conveyor trusses, support towers, and stair platform systems. After new ownership acquired the company in 2002, Warrior expanded to serve additional industries including feed, mining, food processing, sand and gravel, refining, fertilizer, water treatment, biodiesel and ethanol. Warrior also made a substantial investment in equipment to fabricate structural steel for the construction industry. Warrior received AISC certification from the American Institute of Steel Construction in 2011 as well as CWB certification from the Canadian Welding Bureau that same year. In 2012 Warrior expanded its product line to include bulk weigh systems and hopper cones. In 2016 Warrior again expanded its product line to include material handling equipment.

Located in Hutchinson, Minnesota Warrior manufactures in a state of the art 150,000 square foot facility. Our clients have come to expect Warrior's commitment to providing the highest quality products that are efficiently produced to meet our scheduled demand.

DESCRIPTION		FPM	10x12	13x12	15x12	17x12	20x12	10x17	13x17	15x17	17x17	20x17	22x17	25x17	30x17
BPH	EN MASSE 0°	100	1,975	2,675	3,125	3,575	4,275	3,500	4,675	5,450	6,225	7,400	8,125	9,300	11,225
		130	2,575	3,475	4,075	4,650	5,550	4,550	6,075	7,100	8,100	9,600	10,575	12,075	14,600
		150	2,975	4,000	4,700	5,375	6,400	5,250	7,025	8,200	9,325	11,100	12,200	13,950	16,850
	TALL FLIGHT 30°	100	1,550	2,125	2,500	2,875	3,425	1,900	2,375	3,025	3,450	4,125	4,525	5,175	6,300
		130	2,025	2,775	3,250	3,725	4,475	2,475	3,350	3,925	4,475	5,350	5,875	6,750	8,175
		150	2,350	3,200	3,750	4,300	5,150	2,850	3,850	4,525	5,175	6,175	6,775	7,775	9,450
DESCRIPTION		FPM	10x12	13x12	15x12	17x12	20x12	10x17	13x17	15x17	17x17	20x17	22x17	25x17	30x17
CFPH	EN MASSE 0°	100	2,450	3,325	3,900	4,450	5,325	4,375	5,825	6,800	7,750	9,200	10,100	11,575	13,975
		130	3,200	4,325	5,075	5,800	6,925	5,675	7,575	8,850	10,075	11,950	13,150	15,025	18,175
		150	3,700	5,000	5,850	6,675	7,975	6,660	8,750	10,200	11,625	13,800	15,175	17,350	20,975
	TALL FLIGHT 30°	100	1,950	2,650	3,125	3,575	4,275	2,350	3,200	3,750	4,300	5,125	5,625	6,450	7,825
		130	2,525	3,450	4,050	4,650	5,550	3,075	4,150	4,875	5,575	6,650	7,325	8,400	10,200
		150	2,925	3,975	4,675	5,350	6,425	3,550	4,800	5,625	6,450	7,700	8,450	9,675	11,750
DESCRIPTION		FPM	10x12	13x12	15x12	17x12	20x12	10x17	13x17	15x17	17x17	20x17	22x17	25x17	30x17
TPH	EN MASSE 0°	100	55	80	90	105	125	105	140	160	185	220	240	275	335
		130	75	100	120	135	165	135	180	210	240	285	315	360	435
		150	85	120	140	160	190	155	210	245	275	330	360	415	500
	TALL FLIGHT 30°	100	45	60	75	85	100	55	75	90	100	120	135	155	185
		130	60	80	95	110	130	70	100	115	130	160	175	200	245
		150	70	95	110	125	150	95	115	135	155	185	200	230	280
DESCRIPTION		FPM	10x12	13x12	15x12	17x12	20x12	10x17	13x17	15x17	17x17	20x17	22x17	25x17	30x17
MTPH	EN MASSE 0°	100	50	70	85	95	115	95	125	145	165	200	220	250	305
		130	70	90	110	125	150	120	165	190	215	260	285	325	395
		150	80	105	125	145	170	140	190	220	250	300	330	375	455
	TALL FLIGHT 30°	100	40	55	65	75	90	50	70	80	90	110	120	140	170
		130	55	75	85	100	120	65	90	105	120	145	155	180	220
		150	60	85	100	115	140	75	105	120	140	165	180	210	255

*Capacities base on a material density of 48 pounds per cubic foot

DESCRIPTION		17x20	20x20	22x20	25x20	30x20	32x20	20x27	22x27	25x27	30x27	35x27
BPH	EN MASSE 0°	7,525	8,925	9,875	11,275	13,625	14,575	13,075	14,425	16,475	19,875	23,275
		9,775	11,625	12,850	14,675	17,725	18,950	17,000	18,775	21,425	25,850	30,275
		11,300	13,400	14,825	16,925	20,450	21,875	19,625	21,650	24,725	29,825	34,925
	TALL FLIGHT 30°	4,375	5,225	5,775	6,625	8,025	8,575	6,175	6,850	7,825	9,475	11,100
		5,700	6,800	7,525	8,625	10,450	11,150	8,050	8,900	10,200	12,325	14,450
		6,575	7,850	8,675	9,950	12,050	12,875	9,275	10,275	11,750	14,225	16,675
DESCRIPTION		17x20	20x20	22x20	25x20	30x20	32x20	20x27	25x27	30x27	35x27	35x27
CFPH	EN MASSE 0°	9,375	11,125	12,300	14,050	16,975	18,150	16,275	17,975	20,500	24,750	28,975
		12,175	14,450	15,975	18,275	22,075	23,600	21,150	23,350	26,650	32,175	37,675
		14,050	16,700	18,450	21,075	25,475	27,225	24,400	26,950	30,775	37,125	43,475
	TALL FLIGHT 30°	5,450	6,500	7,200	8,250	10,000	10,675	7,700	8,525	9,750	11,800	13,825
		7,100	8,450	9,375	10,725	13,000	13,875	10,025	11,075	12,675	15,350	17,975
		8,200	9,750	10,800	12,375	15,000	16,025	11,550	12,800	14,625	17,700	20,750
DESCRIPTION		17x20	20x20	22x20	25x20	30x20	32x20	20x27	25x27	30x27	35x27	35x27
TPH	EN MASSE 0°	225	265	295	335	405	435	390	430	490	590	695
		290	345	380	435	530	565	505	560	640	770	900
		335	400	440	505	610	650	585	645	735	890	1,040
	TALL FLIGHT 30°	130	155	170	195	240	255	185	205	230	280	330
		170	200	225	255	310	330	240	265	305	365	430
		195	235	260	295	360	385	275	305	350	425	495
DESCRIPTION		17x20	20x20	22x20	25x20	30x20	32x20	20x27	25x27	30x27	35x27	35x27
MTPH	EN MASSE 0°	200	240	265	305	370	395	350	390	445	535	630
		265	315	345	395	480	510	460	505	580	700	820
		305	360	400	455	555	590	530	585	670	805	945
	TALL FLIGHT 30°	115	140	155	180	215	230	165	185	210	255	300
		155	180	200	230	280	300	215	240	275	330	390
		175	210	235	270	325	345	250	275	315	385	450

Mailing Address:
1145 5th Avenue SE
Hutchinson, MN 55350

Warrior Mfg., LLC
Ph: 320-587-5505
Fax: 320-587-3040
E-mail: sales@warriormfgllc.com

www.warriormfgllc.com

WARRIOR MFG

CUSTOM ENGINEERED PRODUCTS THAT DELIVER SOLUTIONS


CLEAN MASSE DRAG CONVEYOR



CLEAN MASSE DRAG CONVEYOR

OPTIONS

- Inlet and Intermediate Gates:
  - Electric
  - Manual
  - Electric Actuated
  - Pneumatic
- Hinged Tail Cleanout
- Tail Take-Up
- Hinged Bottom Liner Cleanouts for Cleaning & Fumigation
- Variety of AR Liner Packages
- Hip Lids
- Hazard Monitoring Sensors
- Factory Assembled Motor and Drives
- Galvanized, Painted or Stainless

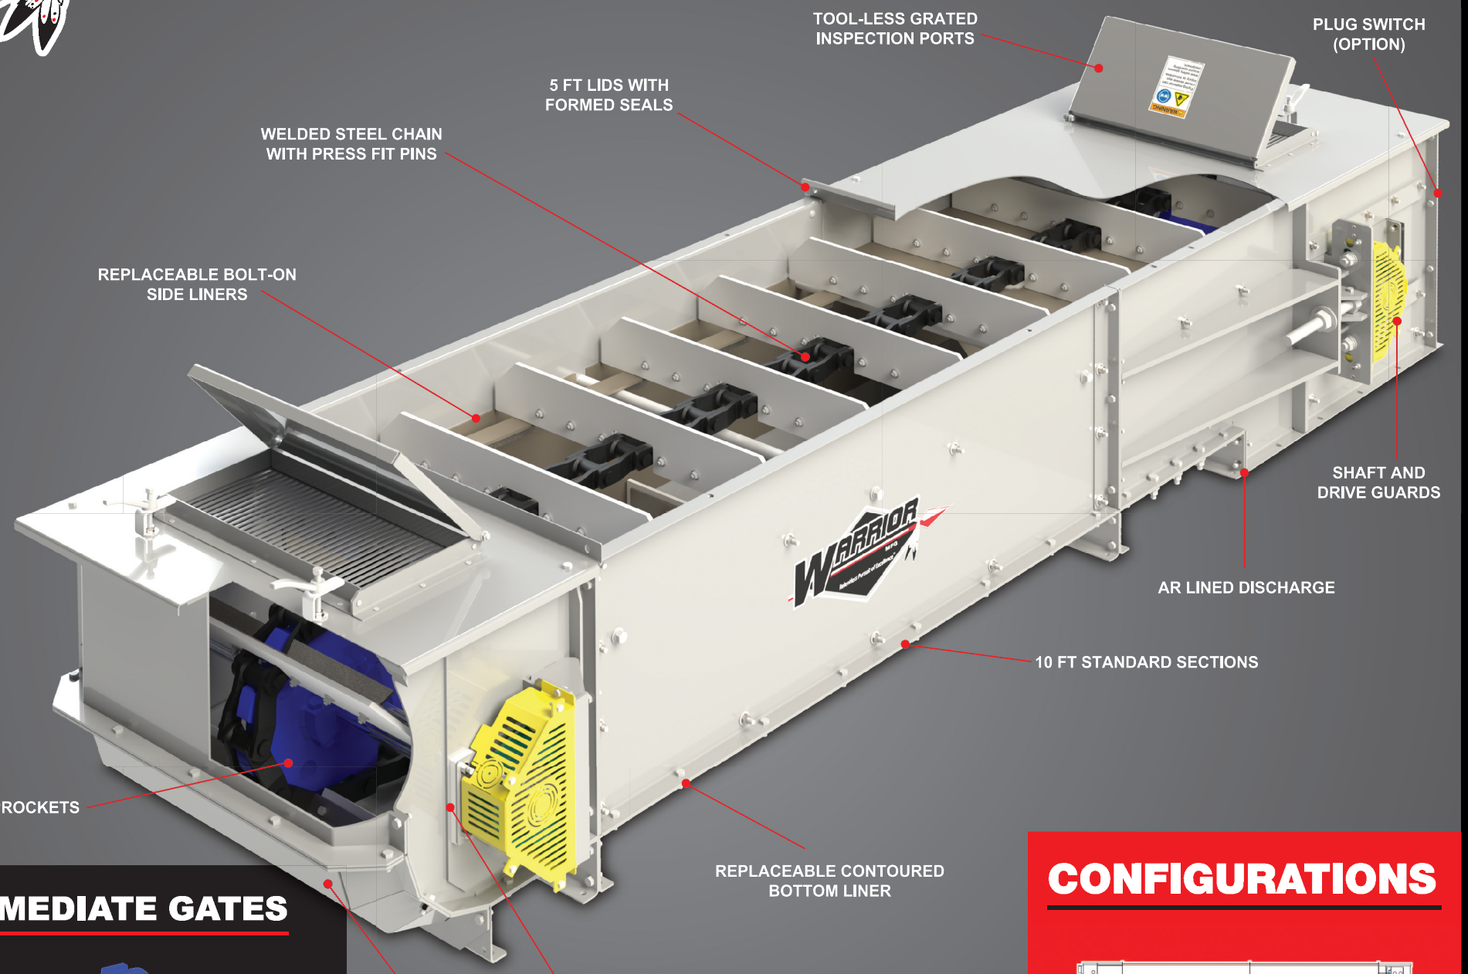


SUPERIOR CLEANOUT




CONTOURED PADDLES DELIVER EXCELLENT CLEANOUT PERFORMANCE MINIMIZING CROSS-CONTAMINATION IN FEED MILLS, FLOUR MILLS, AND GRAIN APPLICATIONS.

INTERMEDIATE GATES




FLUSH MOUNTED CROSS-CUT GATE FOLLOWS BOTTOM CONTOUR FOR IMPROVED MATERIAL DISCHARGE.

CONFIGURATIONS

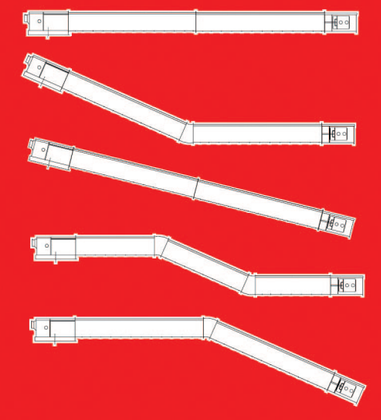

ROLLER RETURN



RAIL RETURN



PAN RETURN



BYPASS INLET



METERED INLET

